




◀ CBES12

Load Curve

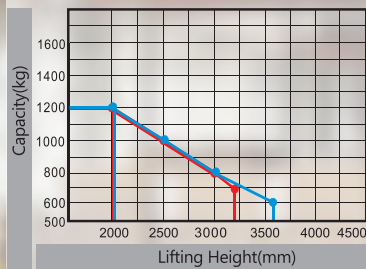

- CPD12-970
- CPD12-910



Characteristics

- AC/EPS
- Automatic lifting limit.
- Curve automatic deceleration devices.
- Emergency reversing device.
- Emergency brake switch.
- Option: fork tilt device.
- Option: Lithium battery.

Electric Stacker Counterbalanced stacker

Model		CBES12	CBES12-FFL
Configuration No.		CPD06-970	CPD06-970
Type		Counterbalanced	Counterbalanced
Mast type		Standard 2-stage	Full free 2-stage
Loading capacity	kg	1200	1200
Load center	mm	500	500
Operating type		Walkie/Rider	Walkie/Rider
Wheels type		PU	PU
Wheel quantity Driving wheel/ Balance wheel/Bearing wheel		1/0/2	1/0/2
lift height	mm	1400/2000/2500/3000/3300/3600	2500/3000/3300
Max.extend height	mm	2500/3100/3600/4100/4400/4700	3150/3650/3900
Mast lowered height	mm	1230/1580/1780/2030/2130/2300	1830/2080/2180
Fork size(length/width/thickness)	mm	1070/100/40	1070/100/40
Overall length	mm	2502/3012	2502/3012
Overall width	mm	1015	1015
Min.Turning radius	mm	1352/1852	1352/1852
Min.Aisle width for pallets 1000×1200	mm	2715/3195	2715/3195
Min.ground clearance	mm	80	80
Travel speed,laden/unladed	km/h	5/5	5/5
Lift speed,laden/unladed	mm/s	130/180	130/180
Gradeability,laden/unladed	%	5/7	5/7
Driving motor/Lift motor/Steering motor	kW	AC1.5/DC3.0/DC0.15	AC1.5/DC3.0/DC0.15
Battery voltage/capacity	V/Ah	24/270	24/270
Brake		Electromagnetic/Regenerative	Electromagnetic/Regenerative
Controller		ZAPI	ZAPI
Battery weight	kg	247	247
Service weight with battery	kg	1765	1921

