


## Load Curve



► **WES12**

► **WES1216-MM**

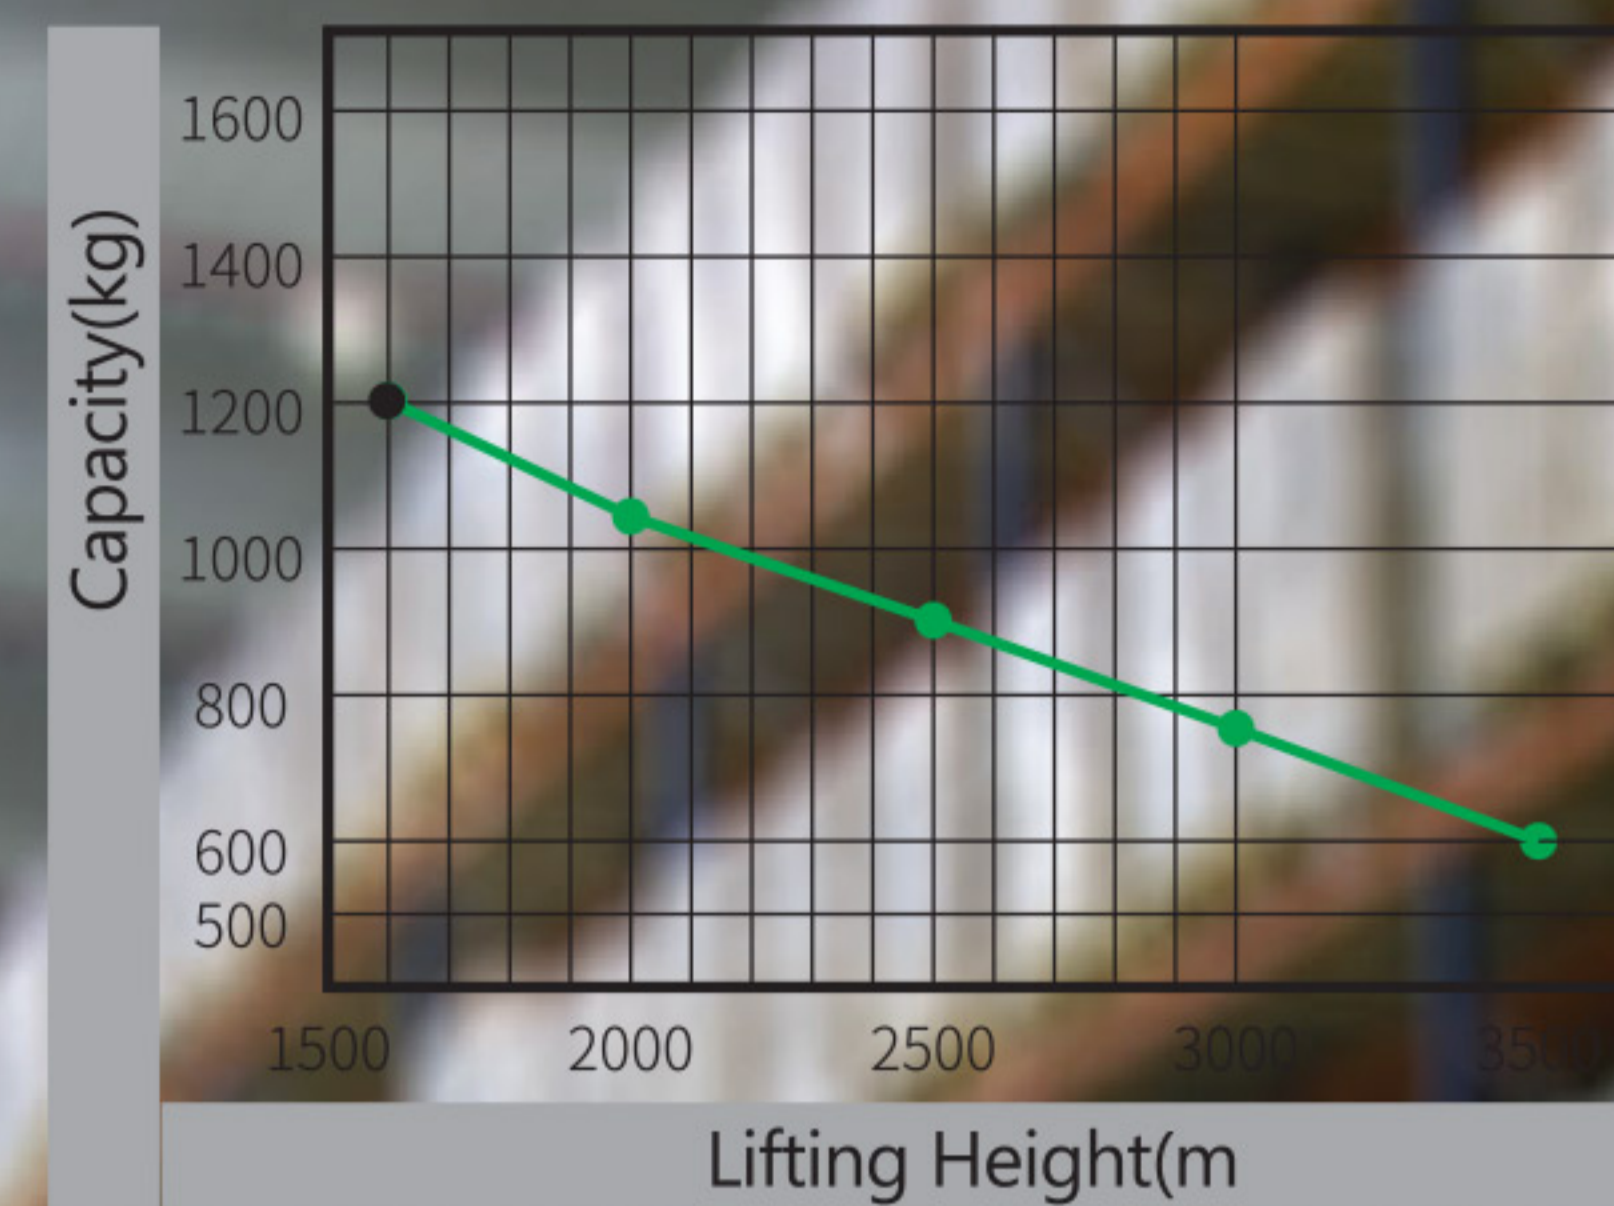

- CDD12J
- CDD12JD

### Characteristics

- High power lift pump.
- Side driving, smaller steering radius.
- The driving system with permanent magnetic motor.
- German water-proof switch.
- Built-in charger.
- Maintenance-free battery.

Model		WES12	WES1216-MM
Configuration No.		CDD12J	CDD12JD
Type		Fork over	Fork over
Mast type		Single mast/Standard 2-stage	Mono mast
Loading capacity	kg	1200	1200
Load center	mm	600	600
Operating type		Walkie	Walkie
Wheels type		PU	PU
Wheel quantity Driving wheel/ Balance wheel/Bearing wheel		1/1/4	1/1/4
lift height	mm	1600 (Single stage) 2000/2500/3000/3500	1600
Max.extend height	mm	2014 (Single stage) 2424/2924/3424/3924	2060
Mast lowered height	mm	2014 (Single stage) 1494/1744/1994/2244	1990
Fork size(length/width/thickness)	mm	1150/160/60	1150/160/60
Overall length	mm	1755	1632
Overall width	mm	795	795
Min.Turning radius	mm	1366	1316
Min.Aisle width for pallets 1000×1200	mm	2068	2048
Min.ground clearance	mm		24
Travel speed,laden/unladed	km/h		4.0/4.2
Lift speed,laden/unladed	mm/s		92/136
Gradeability,laden/unladed	%		6/8
Driving motor/Lift motor	kW		DC0.75/DC2.2
Battery voltage/capacity	V/Ah		2×12/100
Brake			Electromagnetic
Controller			CURITS
Battery weight	kg		2×27
Service weight with battery	kg	425 (Single stage) 441/453/465/477	395

