




## ◀ WES15

### Load Curve

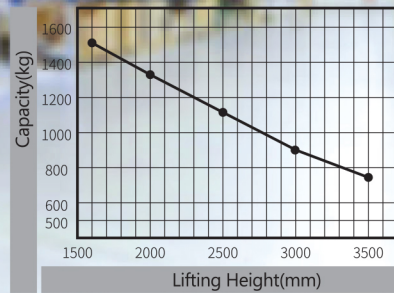

### Characteristics

- High power lift pump.
- Side driving.
- German water-proof switch.
- Built-in charger.
- Maintenance-free battery.

Model		WES15
Configuration No.		CDD15J
Type		Fork over
Mast type		Single mast/Standard 2-stage
Loading capacity	kg	1500
Load center	mm	600
Operating type		Walkie
Wheels type		PU
Wheel quantity Driving wheel/Balance wheel/Bearing wheel		1/1/4
lift height	mm	1600 (Single stage) 2000/2500/3000/3500
Max.extend height	mm	2014 (Single stage) 2424/2924/3424/3924
Mast lowered height	mm	2014 (Single stage) 1495/1745/1995/2245
Fork size(length/width/thickness)		1150/160/60
Overall length		1740
Overall width		795
Min.Turning radius		1342
Min.Aisle width for pallets 1000×1200		2074
Min.ground clearance		26
Travel speed,laden/unladen		4.0/4.2
Lift speed,laden/unladen		92/136
Gradeability,laden/unladen		6/8
Driving motor/Lift motor		AC0.75/DC2.2
Battery voltage/capacity		2×12/100
Brake		Electromagnetic
Controller		CURTIS
Battery weight	kg	2×27
Service weight with battery	kg	430 (Single stage) 471/483/495/507

