




### Load Curve

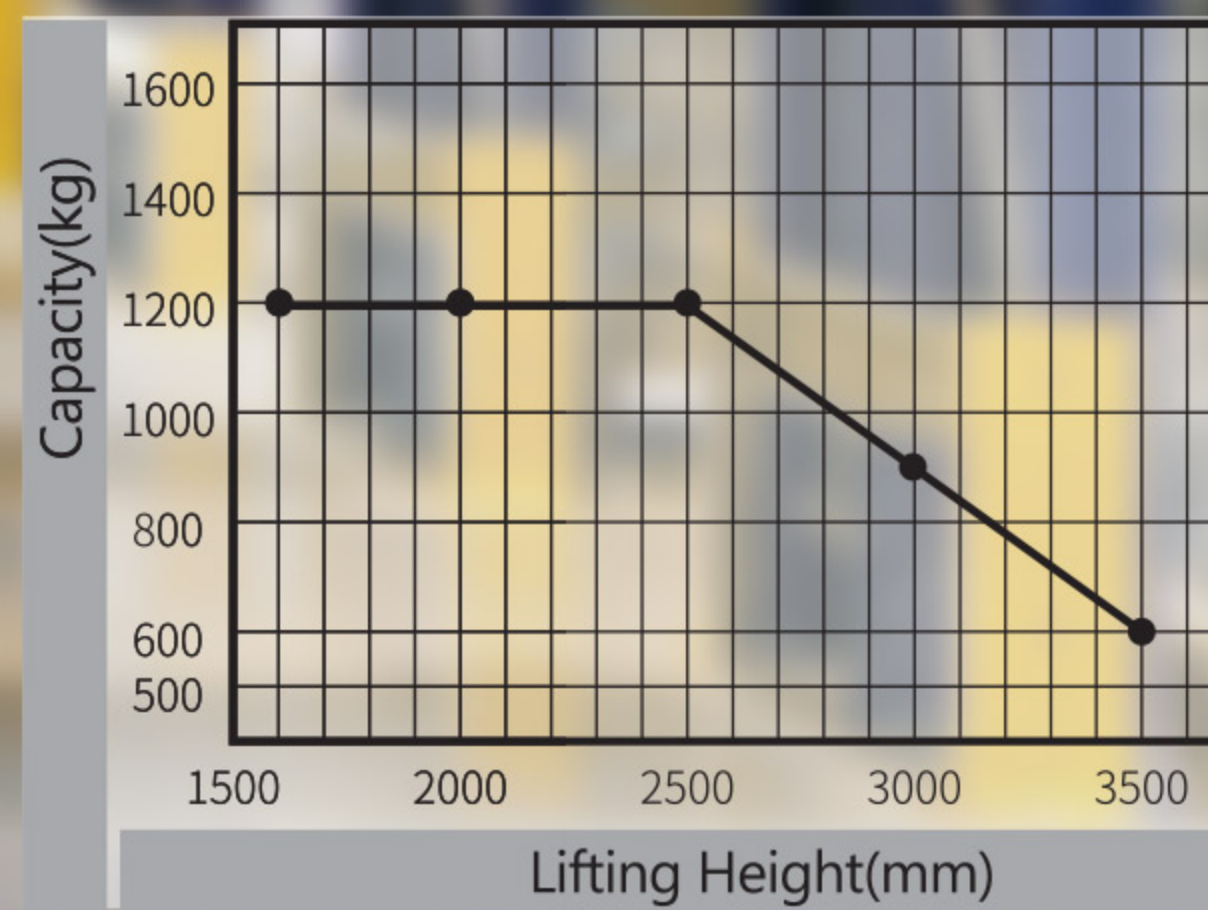

## WESW12

### Characteristics

- High power lift pump.
- Side driving, smaller steering radius.
- The driving system with permanent magnetic motor.
- German water-proof switch.
- Built-in charger.
- Maintenance-free battery.

Model	WESW12	
Configuration No.	CDD12J-K	
Type	Straddle	
Mast type	Single mast/Standard 2-stage	
Loading capacity	kg	1200
Load center	mm	600
Operating type	walkie	
Wheels type	PU	
Wheel quantity Driving wheel/ Balance wheel/Bearing wheel	1/1/4	
lift height	mm	1600 (Single stage) 2000/2500/3000/3500
Max.extend height	mm	2099 (Single stage) 2549/3049/3549/4049
Mast lowered height	mm	2099 (Single stage) 1580/1830/2080/2330
Fork size(length/width/thickness)	1150/100/35	
Overall length	mm	1769
Overall width	mm	1148-1548
Min.Turning radius	mm	1346
Min.Aisle width for pallets 1000×1200	mm	2210
Min.ground clearance	mm	26
Travel speed,laden/unladen	km/h	4.0/4.2
Lift speed,laden/unladen	mm/s	92/136
Gradeability,laden/unladen	%	4/8
Driving motor/Lift motor	kW DC0.75/DC2.2	
Battery voltage/capacity	V/Ah 2×12/100	
Brake	Electromagnetic	
Controller	Curtis	
Battery weight	kg	2×27
Service weight with battery	kg	595 (Single stage) 636/648/660/672

